



***Lifting 990kg at 1.2m, the
1500s Standard Model
delivers reliable lifting power***



***990Kg Lifting Capacity At 1.2M
4 Metre Full Extension
375Kg Lifting Capacity At 4M
Emergency Stop
Slew Operator Protection
Hose Burst Protection
Valve Control Guard
Load Indicator
Compliance - AS1418-11-2014***






***Flexible Mounting Options
Purposely built for the Australian Market
National and International Dealer Network
Specialised Attachments Available
Proudly Australian Made
2 Year Warranty
5 Year Limited Warranty***

KEVREK 1500s Standard Model

CRANE SPECIFICATIONS

TECHNICAL FEATURES:

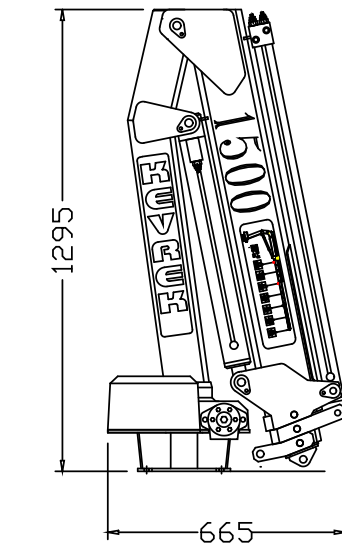



Capacity Class	1.50Tm (14.6kNm)
Maximum Lift Capacity	990kg @ 1.2m Radius
Standard Outreach	3.00m
With Additional Boom	4.00m
Lifting Height Above Base Standard	4.10m
With Additional Boom	5.09m
Outreach Lifting Capacity	1.20m - 990kg
	2.10m - 714kg
	3.00m - 500kg
	4.00m - 375kg

Slewing Torque	2.2 kNm
Slewing Angle	290°
Pump Capacity	4.9 > 7.0l/min
Oil Tank Volume	3.0l
Working Pressure	3200 PSI (223 BAR)
Power Consumption	12 volt 0 > 240 amp
	24 volt 50 > 150 amp

Options:

- Radio Remote Control
- 500Kg Hydraulic Winch
- Manual Swing Up Leg
- Hydraulic Leg
- Multiple Function Pendant Control

Weight Inc/Power Pack And Oil	180kg
Weight - Manual Leg C/W Motor Mount & Storage Mount	18kg
Swing up Hydraulic Stabiliser Leg	43kg
Height Folded	1295mm

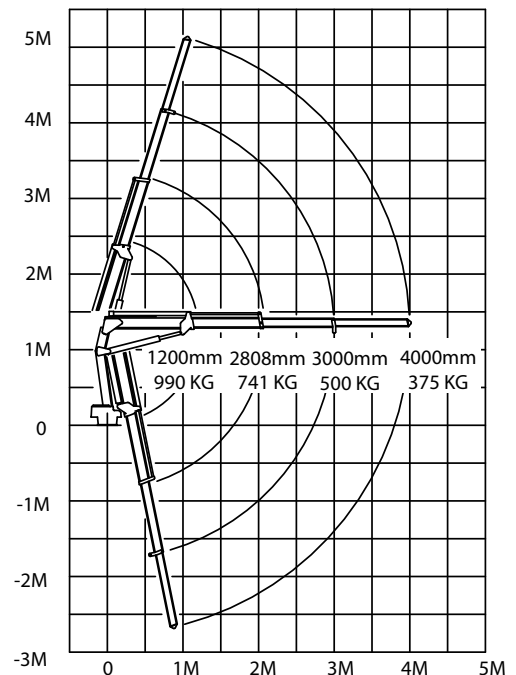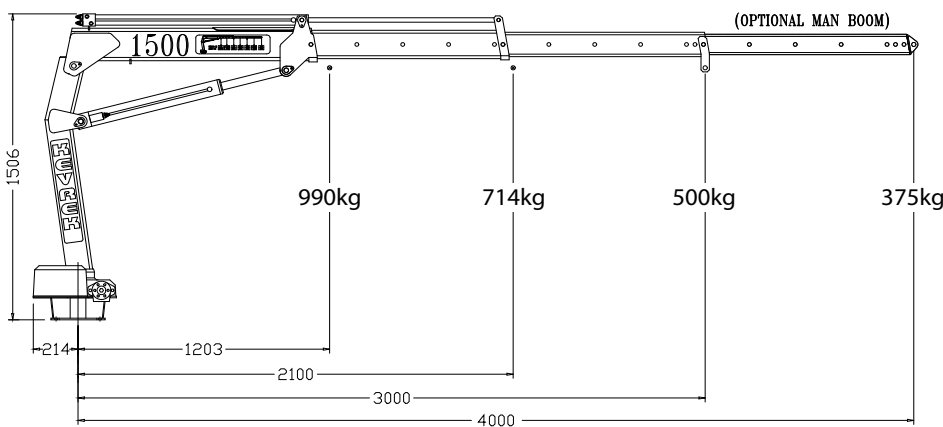

The Australian Lifting Solution



152-156 Beringarra Ave, MALAGA WA 6090
 email: kevrek@kevrek.com.au
 website: www.kevrek.com.au
 Ph: (08) 9248 5922

Kevrek Australia reserves the right to discontinue models or options at any time or change specifications, materials, equipment, or pricing without notice and without incurring obligation.